




# Trend Insert

Designed for installation into an existing masonry chimney making it perfect for replacing an inefficient open fireplace or older insert wood burner. Firebox construction of solid 6mm NZ made steel and firebrick lined for maximum radiant heat.

The thermo fan is required for all installations in a clean air zone and further enhances the convected heat output and circulation. Fascia finished in metallic black high temperature paint.

	Clean air approved model
Heat output	15kW peak heat output
Heating area	Heat up to 150m <sup>2</sup> / 3 bedroom home
Finish	Metallic black high temperature paint
Wetback	N/A
MfE#	101159 (DRY)
Emission	0.91gms (DRY)
Efficiency	65% (DRY)
SKU	250-0870

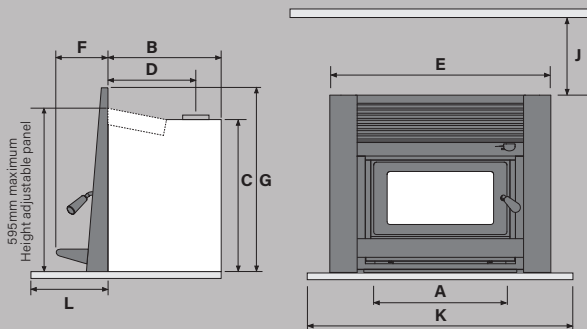

FIREBOX WIDTH	FIREBOX DEPTH	FIREBOX HEIGHT	FLUE CENTRE	FASCIA WIDTH	FASCIA DEPTH	FASCIA HEIGHT	WETBACK INLET	WETBACK OUTLET	MANTEL CLEARANCE	MINIMUM HEARTH WIDTH	MINIMUM HEARTH PROJECTION
A	B	C	D	E	F	G	H	I	J	K	L
560	500	550	405	810	185	650	-	-	340	825	300

All measurements detailed above are in (mm) and do not include the 13mm insulating blanket. Specifications were correct at the time of printing but may alter and those detailed should be used only as a guide. If in doubt, please consult your local Metro Fires stockist.

