


PureMix X7

High Flow Inline Undersink Filter System



MAINS WATER

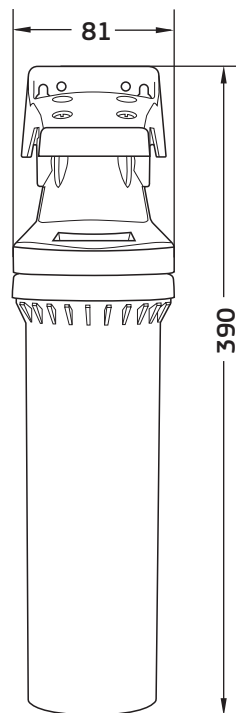

Width	Height	Depth
81	390	105

Note: All dimensions are in mm.

Parts Included



- X7-R filter cartridge
- Valve-in filter head
- Mounting bracket and screws
- Non-return valve
- Flexible braided hose
- Stem adaptor
- Extension kit
- User guide

Specifications

Ordering Code	Temp °C	Pressure** (kPa)	Flow (Lpm)	Micron-Rating*	Connection	Cartridge Size	Capacity*** (L)
PUREMIX-X7	2-38	200-520	0-8	1	1/2" BSP (15mm)	12"	37,500

Notes:

The PureMix X7 system is designed specifically for applications with higher sediment and harsher water quality such as rural supplies, areas with older pipe infrastructure and rainwater.

APPROXIMATE SPACE REQUIRED

Vertical Mount: 450 mm (h) x 215 mm (w)	Horizontal Mount: 215 mm (h) x 450 mm (w)
---	---

PUREMIX-X7 FILTRATION TECHNOLOGY

STAGE 1	<ul style="list-style-type: none"> • Removes particles down to 5 micron. • Clarifies the water. • Reduces sediment, rust, sand, silt and algae.
STAGE 2	<ul style="list-style-type: none"> • Chlorine and chloramine reduction. • Eliminates bad taste and odours. • Chemical pesticides & sulphur reduction.
STAGE 3	<ul style="list-style-type: none"> • Anti-scaling protection. • Protection against hardness (i.e. calcium & magnesium). • Corrosion control.
STAGE 4	<ul style="list-style-type: none"> • Final filtration down to 1 micron* • Fine sediment particle removal.

Warranty:

Use only genuine Puretec replacement cartridge. 1 year warranty** is 1 year parts and labour. Excludes cartridges.



Warning: Please visit www.puretec.com.au/instructions to observe essential manufacturer's instructions before use. Note: No claims can be made based on the specifications and images in this document. The design, technology, colours, features and prices are subject to change. This document and all its contents are copyright protected. All rights are reserved, particularly alteration, translation and reproduction using electronic systems. This spec sheet has been designed to help make product selection easy. However due to the complex nature of water chemistry, we strongly encourage confirming any product selection with one of our team. We may need to perform a water analysis test to confirm contaminants in water. Caution: Do not use with microbiologically unsafe water or water of unknown quality without adequate disinfection before or after the system. Warranty: *Warranties in this document cover parts for the period stated and include cover for parts and labour for the first year where applicable, subject to approval. Excludes consumables. Our Water Filtration Specialists can provide you with advice to suit your needs. **Where line pressure exceeds 520kPa, an approved pressure limiting device must be installed to comply with Australian & New Zealand Plumbing Standards (Ref. AS 3500.1:2021, Clause 3.3.4). Maximum flow depends on cartridges, vessel, pressure, impurities etc. *Micron rating is nominal. ***Capacity is based on inlet chlorine @2ppm ±10%. The term "removal", "eliminate" and "protection" indicates significant reduction, not necessarily 100% removal.