

### FEATURES


- Clean air approved mid-size convection wood fire
- Warm air is convected around the room, combined with radiated heat
- Ideal for better insulated homes and various ceiling heights
- Flush-mount matt black design, 6mm steel
- Vermiculite brick lined firebox
- Multi-burn firebox helps glass remain clear

### SPECIFICATIONS

- Estimated maximum heat output: 15kW
- Heats area up to 190m<sup>2</sup> (typically up to three standard rooms)
- Average emission rate: 0.51g/kg
- Overall average efficiency: 69%
- ECAN Authorisation No. 142831



### INSTALLATION CLEARANCES

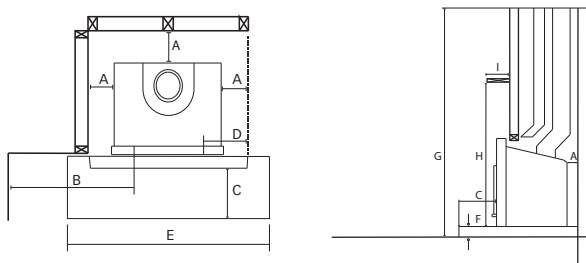

Plan Elevation


Side Elevation

Minimum Installation Clearances (mm)							Maximum Installation Clearances (mm)	
A	B	C*	D	E	F**	G	H	I
25	500	300	200	840	59	2000	1200	160

\* Floor protector from front of fascia.

\*\* Heat sensitive floors only. Refer installation instructions for other floor types.

### DIMENSIONS (MM)

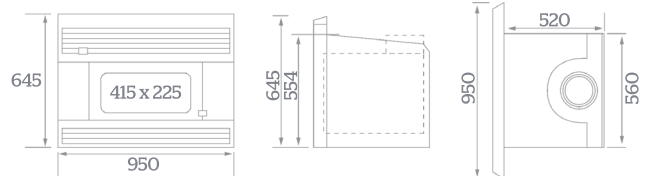

### RECOMMENDED FLUE KITS

Inbuilt Flue Kit ( For Masonry Installation)	KWF298-6025
Zero Clearance Box + 600mm transition only	KWF298-7371
Zero Clearance Box + Flue 3.6m	KWF298-7374

Flue kits including Zero Clearance Box tested to AS/NZS2918 Appendix B report no. 0336. Components tested to Appendix F report number 16/2801.

