



RANGITATA

INBUILT ULTRA-LOW EMISSIONS WOOD FIRE (ULEB)

Rangitata fireplace is a powerful inbuilt ULEB wood fire. Rangitata is leading a new generation of wood burners that produce longer-lasting heat with fewer emissions. Rangitata meets New Zealand's strictest emission standards, providing an eco-friendlier alternative to older wood fires. Ideal for small to medium homes, it has been designed to deliver consistent warmth.



RANGITATA

INBUILT ULTRA-LOW EMISSIONS WOOD FIRE (ULEB)

Rangitata is part of a new generation of wood burners that produce longer-lasting heat with fewer emissions. It meets New Zealand's strictest emission standards, providing an eco-friendly alternative to older wood fires.

- ▶ Ultra-clean burning that is better for air quality
- ▶ For masonry and timber framed (ZC) installations
- ▶ Superior heat from a 6mm steel firebox
- ▶ Durable ceramic bricks
- ▶ Ultra-low emission burner. Approved for all regions in NZ, including Canterbury (ECan CMI testing approved)



BASE OPTIONS



Fire Only	999911	999911
Fascia Only	999910	999910
ZC Box	N.A.	999912
Fire+Fascia	MAW2109	MAW2110
Flue Pack	GDFLU001M	GDFLU021M
Fire+Fascia+ Flue Pack	RANGITATAPACK	RANGITATAZCPACK

Finish	Metallic Black VHT
Space Heat Output**	Suitable for small to medium homes (2-3 bedrooms)
Fascia Dimensions w x h	870 x 713 mm (insert) 870 x 780 mm (ZC)


Clearance Specifications

Dimensions and minimum floor protector sizes as per standard AS/NZS 2918:2001

Model	Space Heat Output	Type	Fascia	Type of Floor Protector	Thickness of Floor Protector	Elevation above ground	D	H	W	F	FF	FH	FW	HW	HD
Rangitata without ash lip	SML-MED	Insert	Standard	IFP-I	> 43	43	510	587	630	100	410	713	870	900	362
		Inbuilt	Standard	Ash	N/A	Ash	607	652	770	197	410	713	870	900	422
Rangitata with ash lip	SML-MED	Insert	Standard	IFP-I	> 33	33	510	587	630	100	410	713	870	900	362
		Inbuilt	Standard	Ash	N/A	Ash	607	652	770	197	410	713	870	900	362

Type of Floor Protectors

IFP-I	One layer of 6mm thick PROMATECT-H & 8mm thick tiles
Ash	Ash Floor Protector

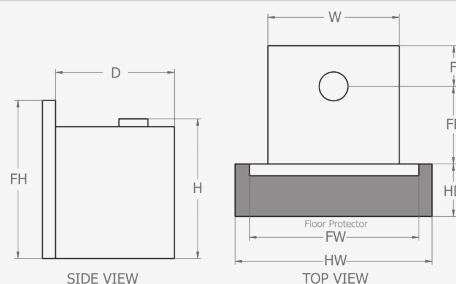

* Refer to the specification sheet for full details of the clearance distances and heat capacity and output.

**Space Heat Output is only a guide based on homes with average insulation, window area, and 2.4m ceiling heights. Differences in these factors, as well as others like, geographical location, layout of the house, living room size, type of windows all play a part in choosing the right model for your heating needs. Consult your dealer or installation contractor for more information.

Glen Dimplex New Zealand Ltd PO Box 58473, Botany, Auckland

Glen Dimplex New Zealand Ltd's policy is one of continuous development. We reserve the right to change size and specifications without notice. For the latest product information and warranty details please refer to www.masportheating.co.nz. Please refer to the installation and operation instructions before having your Masport Wood Fire installed. A full set of these instructions is supplied with each fire.

masportheating.co.nz



Jan 2025